



Black

LG260S1K-A3



LG Electronics, Inc. (Korea Exchange: 06657.KS) is one of the globally leading companies and technology innovator for electronics, information and communication products. The LG Electronics currently employs more than 91,000 people worldwide in 117 companies. In fiscal year 2011, 48.97 billion USD of revenue was achieved.

LG is one of the world's largest manufacturers of mobile phones, flat screen TVs, air conditioners, washing machines and refrigerators. As a futureoriented company, LG enables others to use technology consisting of renewable energies. LG's high quality solar products are being manufactured in LG's leading production facility in South Korea.











Light and Robust

With a weight of just 16.8 kg, LG modules are proven to demonstrate outstanding durability against external pressure up to 5400 Pa.



Convenient Installation

LG modules are carefully designed to benefit installers by allowing quick and easy installations throughout the carrying, grounding, and connecting stages of modules.



100% EL Test Completed

All LG modules pass Electroluminescence inspection. This EL inspection detects cracks and other imperfections unseen by the naked eye.



The LG Mark of Excellence

Customers can rest assure of cutting-edge technology and dependability when they see the LG logo on every cell. The LG logo reflects the high standards that have guided LG for more than 50 years.



Reliable Warranties

LG stands by its products with the strength of a global corporation and sterling warranty policies. LG offers a 10 year product limited warranty and a 25 year limited linear output warranty.



Positive Power Tolerance

LG provides rigorous quality testing to solar modules to assure customers of the stated power outputs of all modules, with a positive nominal tolerance starting at 0%.

LG260S1K-A3

Mechanical Properties

Cells	6 x 10	
Cell vendor	LG	
Cell type	Monocrystalline	
Cell dimensions	156 x 156 mm / 6 x 6 in	
# of busbar	3	
Dimensions (L x W x H)	1640 x 1000 x 35 mm	
	64.57 x 39.37 x 1.38 in	
Static snow load	5400 Pa / 113 psf	
Static wind load	2400 Pa / 50 psf	
Weight	16.8 ± 0.5 kg / 36.96 ± 1.1 lb	
Connector type	MC4 connector IP 67	
Junction box	IP 67 with 3 bypass diodes	
Length of cables	2 x 1000 mm / 2 x 39.37 in	
Glass	High transmission tempered glass	
Frame	Anodized aluminum	

Certifications and Warranty


Certifications	IEC 61215, IEC 61730-1/-2,	
	UL 1703, ISO 9001	
Product warranty	10 years	
Output warranty of Pmax (measurement Tolerance ± 3%)	Linear warranty*	


^{* 1) 1}st year: 97%, 2) After 2nd year: 0.7%p annual degradation, 3) 80.2% for 25 years

Temperature Coefficients

NOCT	47.0 ± 2 °C	
Pmpp	-0.44 %/°C	
Voc	-0.31 %/°C	
lsc	0.05 %/°C	

Characteristic Curves

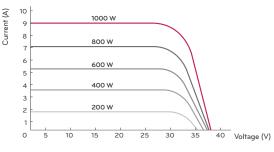

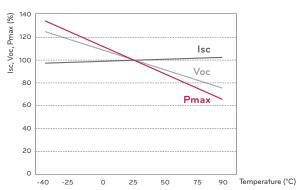

Electrical Properties (STC*)

	LG260S1K-A3	
Maximum power at STC (Pmpp)	260	
MPP voltage (Vmpp)	31.2	
MPP current (Impp)	8.34	
Open circuit voltage (Voc)	38.2	
Short circuit current (Isc)	8.88	
Module efficiency (%)	15.9	
Operating temperature (°C)	-40 ~ +90	
Maximum system voltage (V)	1000 (IEC), 600 (UL)	
Maximum series fuse rating (A)	15	
Power tolerance (%)	0 ~ +3	


 $^{^{\}ast}$ STC (Standard Test Condition): Irradiance 1000 W/m², module temperature 25 °C, AM 1.5


Electrical Properties (NOCT*)

	LG260S1K-A3
Maximum power (Pmpp)	189
MPP voltage (Vmpp)	28.3
MPP current (Impp)	6.66
Open circuit voltage (Voc)	35.1
Short circuit current (Isc)	7.18
Efficiency reduction (from 1000 W/m² to 200 W/m²)	< 4.5 %

^{*} NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/ m^2 , ambient temperature 20 °C, wind speed 1 m/s

Dimensions (mm/in)

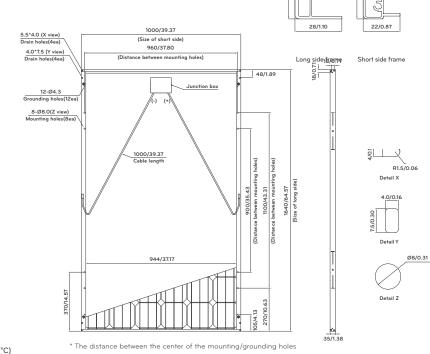



Copyright © 2013 LG Electronics. All rights reserved. 09/01/2013







NJ 07632

North America Solar Business Team LG Electronics U.S.A. Inc

1000 Sylvan Ave, Englewood Cliffs,

^{*} The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.